


SITUACIJA

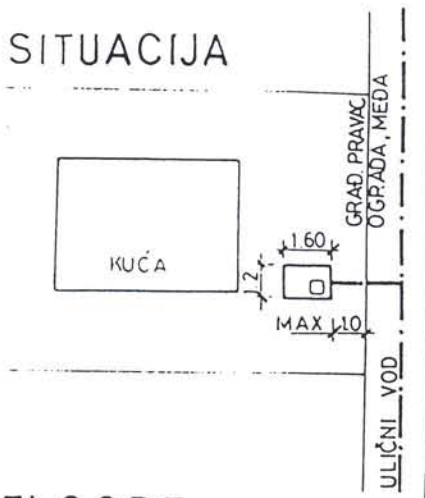

VODOMJERNO OKNO


MJ 1 : 25

NAPOMENA:

VODOMJERNO OKNO MORA BITI LOCIRANO MAX. 1,0 M OD OGRADE. GRAĐEVINSKOG PRAVCA, ODNOSNO MEĐE PARCELE.


/UKOLIKO NIJE PRAVILNO IZVEDENO ISTO SE NEĆE PRIHVATITI/

TLOCRT

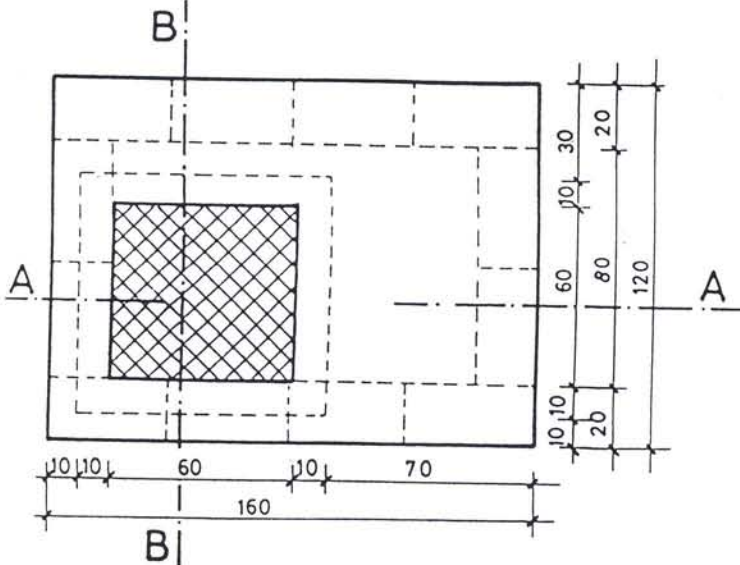

	MATERIJAL	JED. MJERE	KOLIČINA
1.	BETONSKI BLOKOVI 20/20/40	kom	72
2.	BETON ZA ULAZNO OKNO I DNO MB-20	m3	0,304
3.	BETON ZA PLOČU MB-30	m3	0,234
4.	DAŠČANA OPLATA OKNA I PLOČE	m2	3,56
5.	CEMENT	kg	122,88
6.	ŠLJUNAK	m3	0,65
7.	ARMATURA PLOČE	kg	38,4
8.	STUPALJKE OD BET. ŽELJEZA Ø 18	kom	4
9.	ŽELJEZNI POKLOPAC VEL. 60X60	kom	1

PRESJEK A-A

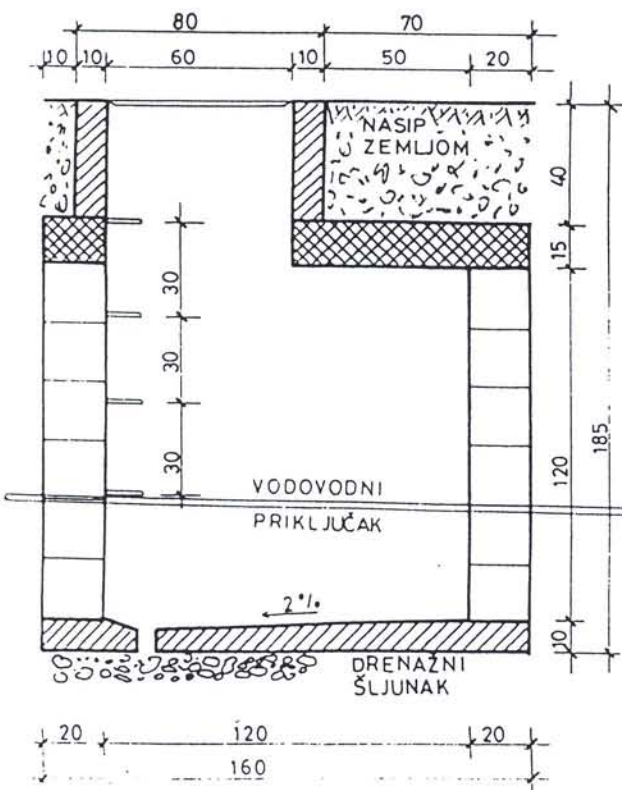

PRESJEK B-B

